


# AO895

## System 800xA hardware selector

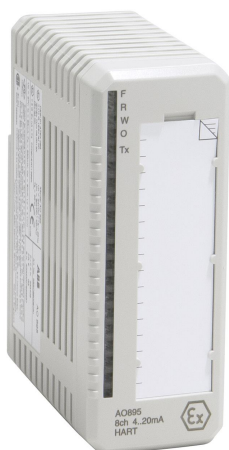

The AO895 Analog Output Module has 8 channels. The module includes Intrinsic Safety protection components and HART interface on each channel for connection to process equipment in hazardous areas without the need for additional external devices.

Each channel can drive up to 20 mA loop current into a field load such as an Ex certified current-to-pressure converter and is limited to 22 mA in overload conditions. All eight channels are isolated from the ModuleBus and power supply in one group. Power to the output stages is converted from the 24 V on the power supply connections.

### Features and benefits

- 8 channels of 4...20 mA outputs.
- HART communication.
- 1 group of 8 channels isolated from ground.
- Power to drive Ex certified I/P actuators.

General info	
Type	Analog Output
Signal specification	4...20 mA
Article number	3BSC690087R1
Number of channels	8
Signal type	Unipolar single ended
HART	Yes
SOE	No
Redundancy	No
High integrity	No
Intrinsic safety	Yes
Mechanics	S800

<b>Detailed data</b>	
Resolution	12 bit
Isolation	Groupwise isolated from ground
Under/over range	2.5 / 22.4mA
Output load	<725 ohms at 20 mA, no over-range <625 ohms at up to 22 mA
Error	Typ. 0.05%, Max. 0.1% at 650 ohms
Temperature drift	Typ. 50 ppm/°C, Max. 100 ppm/°C
Rise Time	30 ms (10% to 90%)
Current limiting	Short circuit proof current limited output
Rated insulation voltage	50V
Dielectric test voltage	500 V a.c.
Power dissipation	4.25 W
Current consumption +5 V Modulebus	Typ. 130 mA
Current consumption +24 V external	Typ. 250 mA, Max. <330 mA

<b>Diagnostics</b>	
Front LED's	F(ault), R(un), W(arning), O(SP), Tx (HART communication)
Supervision	Internal process supply, Open wire if > 1 mA is set

<b>Environment and certification</b>	
CE mark	Yes
Electrical safety	IEC 61131-2, FM
Hazardous Location	C1 Div 2 cULus, C1 Zone 2 cULus, ATEX Zone 2
Marine certification	-
Protection rating	IP20 according to IEC 60529
Corrosive atmosphere ISA-S71.04	G3
Climatic operating conditions	0 to +55 °C (Storage -40 to +70 °C), RH=5 to 95 % no condensation, IEC/EN 61131-2
Pollution degree	Degree 2, IEC 60664-1
Mechanical operating conditions	IEC/EN 61131-2
EMC	EN 61000-6-4 and EN 61000-6-2
Overvoltage categories	IEC/EN 60664-1, EN 50178
Equipment class	Class I according to IEC 61140; (earth protected)
Max ambient temperature	55 °C (131 °F), for vertical mounting in compact MTU 40 °C (104 °F)
RoHS compliance	EN 50581:2012

<b>Compability</b>	
Use with MTU	TU890, TU891 and TU891Z
Keying code	AF

<b>Intrinsic Safety parameters</b>	
U0 (Groups CENELEC USA)	IIC
IO (Groups CENELEC USA)	IIB
P0 (Groups CENELEC USA)	IIA
U0 - CO (uF)	0.087
U0 -LO (mH)	4.1
U0 -L/R (uH/O)	55
IO - CO (uF)	0.702
IO -LO (mH)	16.4
IO -L/R (uH/O)	222
P0 - CO (uF)	2.23
P0 -LO (mH)	32.8
P0 -L/R (uH/O)	443

---

**Dimensions**

---

Height	119 mm (4.7")
Width	45 mm (1.77")
Depth	102 mm (4.01"), 111 mm (4.37") including connector
Weight	0.2 kg (0.44 lbs.)

---

---

## Related products



**TU891**



**TU890**

---

[www.abb.com/800xA](http://www.abb.com/800xA)  
[www.abb.com/controlsystems](http://www.abb.com/controlsystems)

---

800xA is a registered or pending trademark of ABB. All rights to other trademarks reside with their respective owners.

We reserve the right to make technical changes to the products or modify the contents of this document without prior notice. With regard to purchase orders, the agreed particulars shall prevail. ABB does not assume any responsibility for any errors or incomplete information in this document.

We reserve all rights to this document and the items and images it contains. The reproduction, disclosure to third parties or the use of the content of this document – including parts thereof – are prohibited without ABB's prior written permission.

Copyright© 2018 ABB All rights reserved