


# PP882

## System 800xA hardware selector

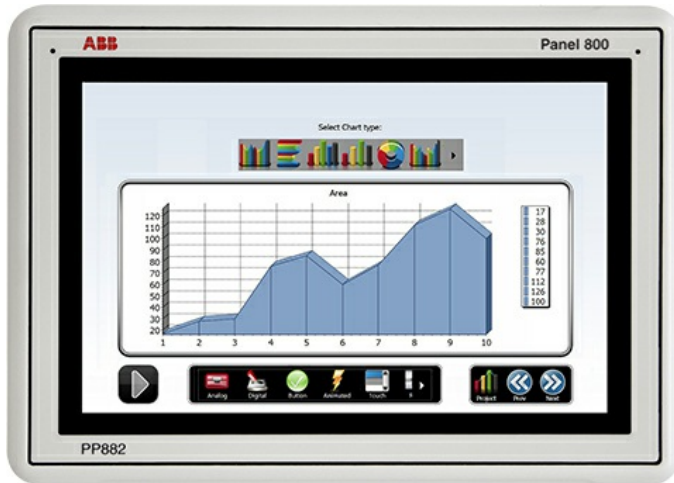

Designed to provide intuitive, fast response rates, ready-to-use templates and libraries, multiple language support and more. The PP882 and PP885 are designed as a cost-effective, safe and efficient way of monitoring and controlling complex HMI applications.

The high performance panels provides improved process visibility through high-resolution widescreen in 12.1" and 15.4", 262,000 color TFT/LED display with quicker access to multiple applications and an easy-to-use and navigate touchscreen interface.

### Features and benefits

- Easy to use**  
 A fully deployable HMI with comprehensive and integrated templates and libraries for every conceivable process. The Panel Builder tool, with familiar Microsoft® Windows® environment along with multiple language support results in remarkably quick, easy and efficient engineering.
- State-of-the-arts graphics**  
 Vector-based, high-resolution graphics in TFL/LED display, with icon-based interface, navigation and control.
- Robust and reliable**  
 Panel 800 is constructed in a strong yet lightweight diecast, powder-coated aluminum housing. IP65/IP20 front casing withstands wet, dusty and demanding environments. Operating temperatures ranging between -10° C to +50° C with maximum 85% humidity.
- Truly open platform**  
 Built on open architecture and technologies that accompany the .NET framework, these panels are capable of multi-brand controller connectivity. A multitude of connection options are available for local communication, expansion, remote access and more.
- Try your application before you use it**  
 Nice possibility to simulate and run the application directly from the Panel Builder 800 before you use it.

<b>General info</b>	
Article number	3BSE069275R1
Category	High performance
Display type	Touch
Display size	12.1"
Brightness	Standard brightness (400 cd/m <sup>2</sup> )
Display resolution, ratio	1280 x 800 (16:10)
Processor	Intel® Atom (1.1GHz)
Main memory	1GB (DDR2)
External storage media	1 x SD card (or SDHC with latest image loaded)
Dimension WxHxD (mm)	340 x 242 x 79
Net weight (kg)	2.6
Power supply	+24 VDC (18-32 VDC)
Operating temperature	-10 to +50 °C

<b>Detailed data</b>	
View angle (H/V)	176° / 176°
Dimming	Yes
Interaction type	Resistive touch, 1 million finger touch operations
Realtime clock	Yes
Ethernet (shielded RJ 45)	2 built-in ports: 1 x 10/100/1000 Mbit/s, 1 x 100 Mbit/s
USB	3 x USB 2.0, max. 500 mA
Serial port	2 combined ports: 2 x RS232, 2 x RS422/485

<b>Environmental and certification</b>	
Frame material, front foil	Powder-coated aluminum, Polyester Autotex EBA180L
Power consumption	22W
Protection (front/rear)	IP65 / IP20
Relative operating humidity	5-85% non-condensing
Storage temperature	-20 to +70 °C
Vibration and shock	0.7 G / 10 G
CE-marking	CE
UL	UL 508
RoHS compliance	EN 50581:2012
WEEE compliance	DIRECTIVE/2012/19/EU

<b>Dimensions</b>	
Dimension WxHxD (mm)	340 x 242 x 79
Cut-out dimension WxH (mm)	324 x 226
Mounting depth mm. (Including clearance)	72 (172)
Mounting	Panel Mount and VESA 75 x 75

—  
[www.abb.com/800xA](http://www.abb.com/800xA)  
[www.abb.com/controlsystems](http://www.abb.com/controlsystems)

—  
800xA is a registered or pending trademark of ABB. All rights to other trademarks reside with their respective owners.

We reserve the right to make technical changes to the products or modify the contents of this document without prior notice. With regard to purchase orders, the agreed particulars shall prevail. ABB does not assume any responsibility for any errors or incomplete information in this document.

We reserve all rights to this document and the items and images it contains. The reproduction, disclosure to third parties or the use of the content of this document – including parts thereof – are prohibited without ABB's prior written permission.

Copyright© 2018 ABB All rights reserved