


# DO880

## System 800xA hardware selector

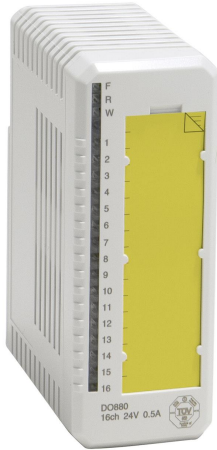

The DO880 is a 16 channel 24 V digital output module for single or redundant application. The maximum continuous output current per channel is 0.5 A. The outputs are current limited and protected against over temperature. Each output channel consists of a current limited and over temperature protected high side driver, EMC protection components, inductive load suppression, output state indication LED and an isolation barrier to the Modulebus.

### Features and benefits

- 16 channels for 24 V d.c. current sourcing outputs in one isolated group
- Redundant or single configuration
- Loop monitoring, supervision of short and open load with configurable limits (see table Table 97).
- Diagnostic of output switches without pulsing on outputs
- Advanced on-board diagnostics
- Output status indicators (activated/error)
- Degraded mode for normally energized channels (supported from DO880 PR:G)
- Current limitation at short circuit and over-temperature protection of switches
- Fault tolerance of 1 (as defined in IEC 61508) for output drivers. For ND (Normally De-energized) systems, outputs can still be controlled with error on output drivers
- Certified for SIL3 according to IEC 61508
- Certified for Category 4 according to EN 954-1.

General info	
Type	Digital Output
Signal specification	24 V d.c. (19.2 - 32 V d.c.), 0.5 A
Article number	3BSE028602R1
Number of channels	16
Signal type	Current sourcing, current limiting
HART	No
SOE	No
Redundancy	Yes
High integrity	Yes
Intrinsic safety	No
Mechanics	S800

Detailed data	
Isolation	Groupwise isolated from ground
Current limiting	Short circuit proof current limited output
Maximum field cable length	600 meters (656 yards)
Rated insulation voltage	50 V
Dielectric test voltage	500 V a.c.
Power dissipation	5.6 W (0,5 A x 16 channels)
Current consumption +5 V Modulebus	45 mA
Current consumption +24 V Modulebus	Max. 50 mA
Current consumption +24 V external	10 mA

Diagnostics	
Front LED's	F(ault), R(un), W(arning), Channel 1-16 Status/Error
Supervision	Process power per channel Loop supervision configurable for loop resistance from 50 Ω to 2 kΩ dependent of configuration and mode of operation Internal circuitry
Status indication of supervision	Module Error, Module Warning, Internal channel error

Environment and certification	
CE mark	Yes
Electrical safety	IEC 61131-2, UL 508
Hazardous Location	C1 Div 2 cULus, C1 Zone 2 cULus, ATEX Zone 2
Marine certification	ABS, BV, DNV-GL, LR, RS, CCS
Protection rating	IP20 according to IEC 60529
Corrosive atmosphere ISA-S71.04	G3
Climatic operating conditions	0 to +55 °C (Storage -40 to +70 °C), RH=5 to 95 % no condensation, IEC/EN 61131-2
Pollution degree	Degree 2, IEC 60664-1
Mechanical operating conditions	IEC/EN 61131-2
EMC	EN 61000-6-4 and EN 61000-6-2
Overvoltage categories	IEC/EN 60664-1, EN 50178
Equipment class	Class I according to IEC 61140; (earth protected)
Max ambient temperature	55 °C (131 °F), for vertical mounting in compact MTU 40 °C (104 °F)
RoHS compliance	EN 50581:2012
WEEE compliance	DIRECTIVE/2012/19/EU

Compability	
Use with MTU	TU810, TU812, TU814, TU830, TU833, TU842, TU843, TU852
Keying code	FE

**Dimensions**

Height	119 mm (4.7")
Width	45 mm (1.77")
Depth	102 mm (4.01"), 111 mm (4.37") including connector
Weight	0.20 kg (0.44 lbs.)

## Related products



**TU814V1**



**TU810V1**



**TU852**



**TU833**



**TU812V1**



**TU843**



**TU830V1**



**TU842**

---

[www.abb.com/800xA](http://www.abb.com/800xA)  
[www.abb.com/controlsystems](http://www.abb.com/controlsystems)

---

800xA is a registered or pending trademark of ABB. All rights to other trademarks reside with their respective owners.

We reserve the right to make technical changes to the products or modify the contents of this document without prior notice. With regard to purchase orders, the agreed particulars shall prevail. ABB does not assume any responsibility for any errors or incomplete information in this document.

We reserve all rights to this document and the items and images it contains. The reproduction, disclosure to third parties or the use of the content of this document – including parts thereof – are prohibited without ABB's prior written permission.

Copyright© 2019 ABB All rights reserved